

General Description

- Low $R_{SS(ON)}$
- With ESD protection to improve battery performance and safety
- Common drain configuration for design simplicity
- RoHS 2.0 and Halogen-Free Compliant

Applications


- Battery protection switch
- Mobile device battery charging and discharging

Product Summary

V_{SS}	20V
$R_{SS(ON)}$ (at $V_{GS}=4.5V$)	< 11.5m Ω
$R_{SS(ON)}$ (at $V_{GS}=3.8V$)	< 12.5m Ω
$R_{SS(ON)}$ (at $V_{GS}=3.1V$)	< 15m Ω
$R_{SS(ON)}$ (at $V_{GS}=2.5V$)	< 20m Ω

Typical ESD protection

HBM Class 2

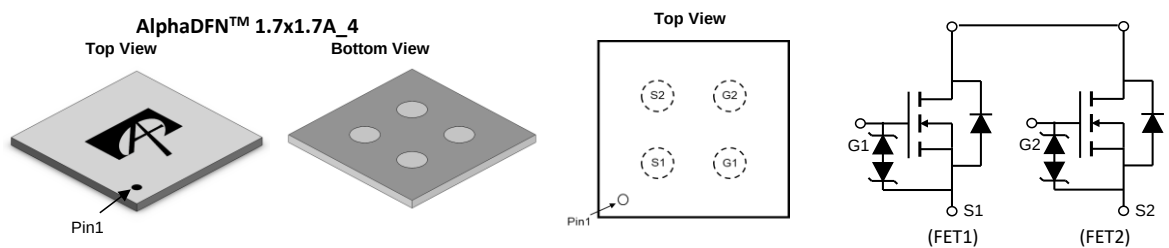

Orderable Part Number	Package Type	Form	Minimum Order Quantity
AOC2870C	AlphaDFN™ 1.7x1.7A_4	Tape & Reel	8000

Absolute Maximum Ratings $T_A=25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	Rating	Units
Source-Source Voltage	V_{SS}	20	V
Gate-Source Voltage	V_{GS}	± 12	V
Source Current(DC) ^{Note1}	I_S	9	A
Source Current(Pulse) ^{Note2}	I_{SM}	36	A
Power Dissipation ^{Note1}	P_D	1.3	W
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to 150	$^\circ\text{C}$

Thermal Characteristics

Parameter	Symbol	Typical	Maximum	Units
Maximum Junction-to-Ambient	$R_{\theta JA}$	70	84	$^\circ\text{C/W}$
Maximum Junction-to-Ambient		80	96	$^\circ\text{C/W}$

Electrical Characteristics (T_j=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC PARAMETERS						
BV _{SSS}	Source-Source Breakdown Voltage	I _S =250μA, V _{GS} =0V Test Circuit 6	20			V
I _{SSS}	Zero Gate Voltage Source Current	V _{SS} =20V, V _{GS} =0V Test Circuit 1 T _j =55°C			1 5	μA
I _{GSS}	Gate leakage current	V _{SS} =0V, V _{GS} =±10V Test Circuit 2			±10	μA
V _{GS(th)}	Gate Threshold Voltage	V _{SS} =V _{GS} , I _S =250μA Test Circuit 3	0.55	0.95	1.35	V
R _{SS(ON)}	Static Source to Source On-Resistance	V _{GS} =4.5V, I _S =3A Test Circuit 4 T _j =125°C	6.4 8.8	9.2 12.5	11.5 15.6	mΩ
		V _{GS} =3.8V, I _S =3A Test Circuit 4	6.9	9.85	12.5	mΩ
		V _{GS} =3.1V, I _S =3A Test Circuit 4	7.8	11.2	15	mΩ
		V _{GS} =2.5V, I _S =3A Test Circuit 4	9.7	14	20	mΩ
g _{FS}	Forward Transconductance	V _{SS} =5V, I _S =3A Test Circuit 3		30		S
V _{FSS}	Forward Source to Source Voltage	I _S =1A, V _{GS} =0V Test Circuit 5		0.65	1	V
DYNAMIC PARAMETERS						
R _g	Gate resistance	f=1MHz		2.1		KΩ
SWITCHING PARAMETERS						
Q _g	Total Gate Charge	V _{GS1} =4.5V, V _{SS} =10V, I _S =3A		11.5		nC
t _{D(on)}	Turn-On DelayTime	V _{GS1} =4.5V, V _{SS} =10V, R _L =3.3Ω, R _{GEN} =3Ω Test Circuit8		1.2		μs
t _r	Turn-On Rise Time			3.1		μs
t _{D(off)}	Turn-Off DelayTime			1.6		μs
t _f	Turn-Off Fall Time			6		μs

Note 1. I_S rated value is based on bare silicon.Mounted on 70mmx70mm FR-4 board.

Note 2. PW <10 μs pulses, duty cycle 1% max.

APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO MAKE CHANGES TO PRODUCT SPECIFICATIONS WITHOUT NOTICE. IT IS THE RESPONSIBILITY OF THE CUSTOMER TO EVALUATE SUITABILITY OF THE PRODUCT FOR THEIR INTENDED APPLICATION. CUSTOMER SHALL COMPLY WITH APPLICABLE LEGAL REQUIREMENTS, INCLUDING ALL APPLICABLE EXPORT CONTROL RULES, REGULATIONS AND LIMITATIONS.

AOS' products are provided subject to AOS' terms and conditions of sale which are set forth at:

http://www.aosmd.com/terms_and_conditions_of_sale

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

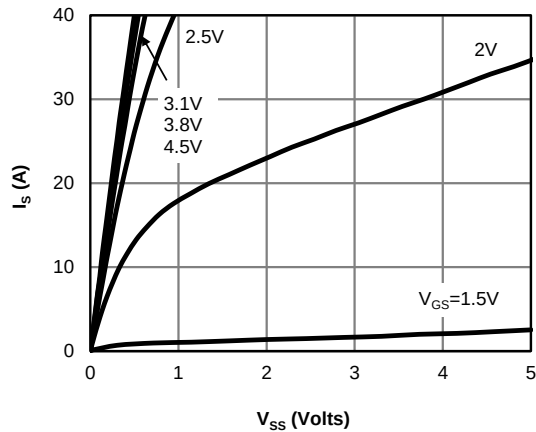


Figure 1: On-Region Characteristics

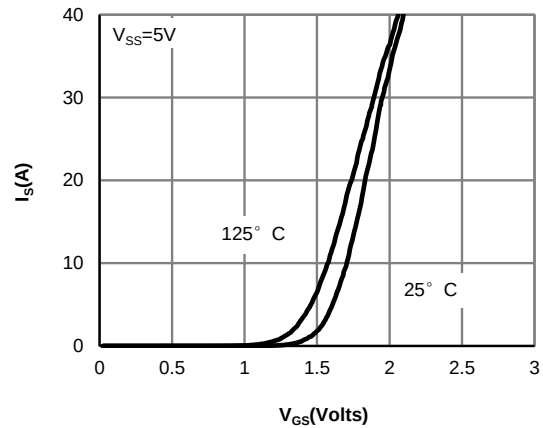


Figure 2: Transfer Characteristics

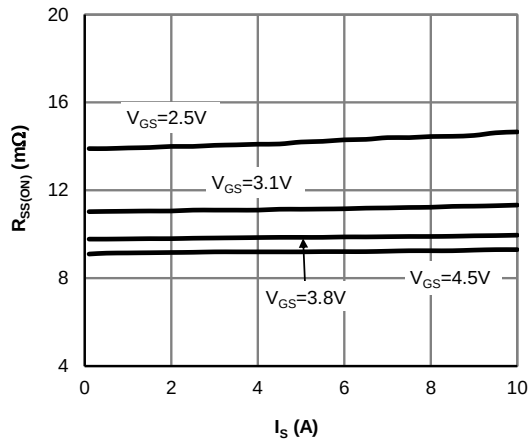


Figure 3: On-Resistance vs. Source Current and Gate Voltage

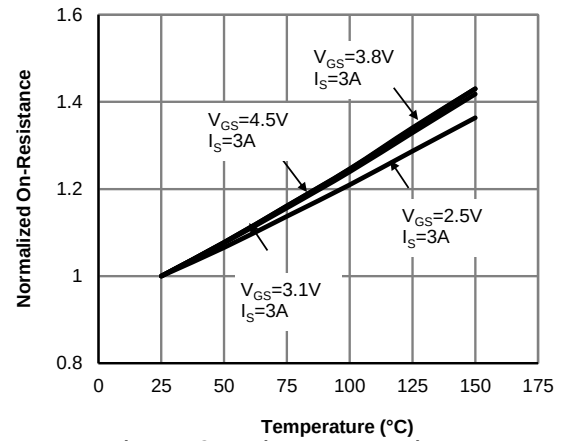


Figure 4: On-Resistance vs. Junction Temperature

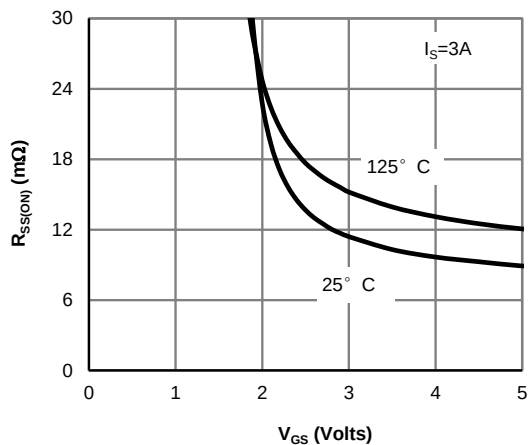


Figure 5: On-Resistance vs. Gate-Source Voltage





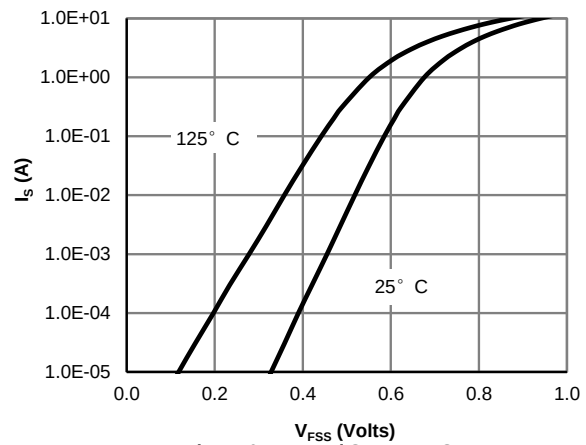



Figure 6: Forward Source to Source Characteristics

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

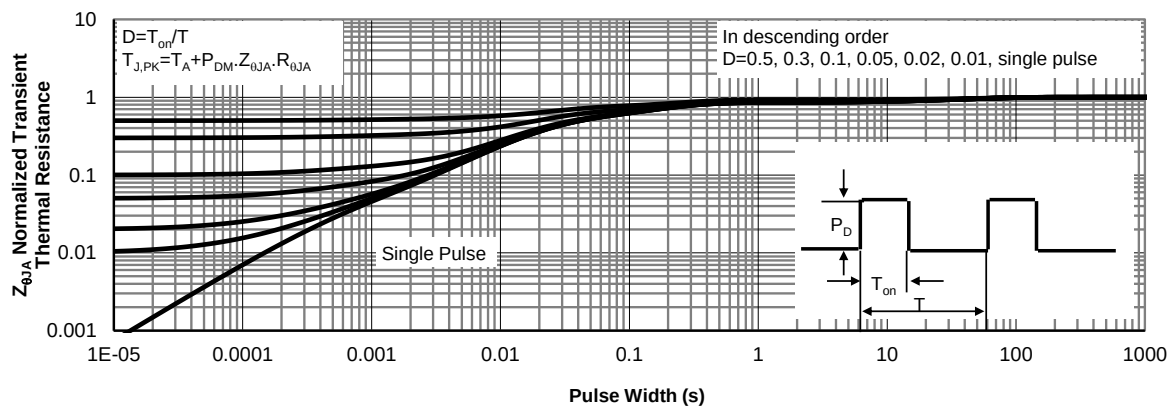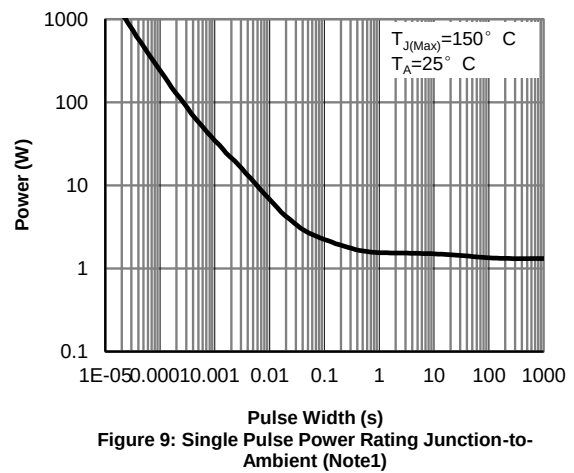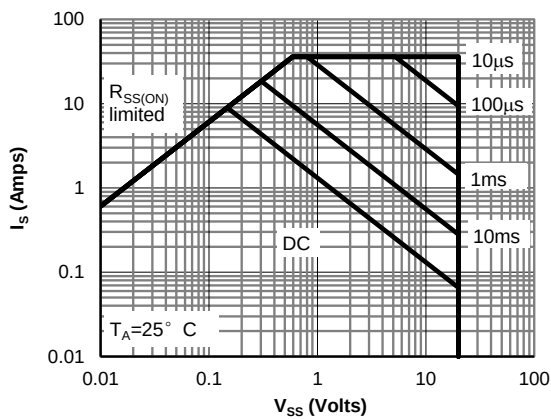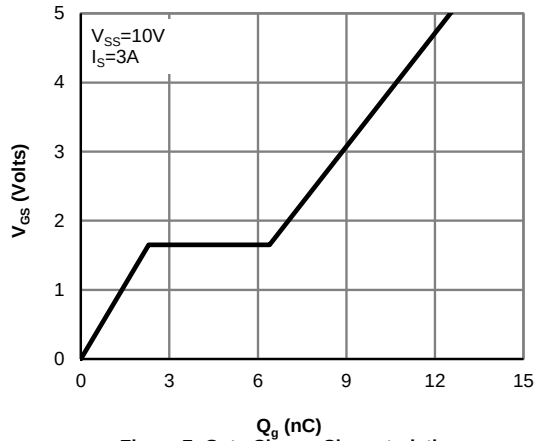

TEST CIRCUIT 1 I_{SSS}


POSITIVE VSS FOR ISSS+
NEGATIVE VSS FOR ISSS-

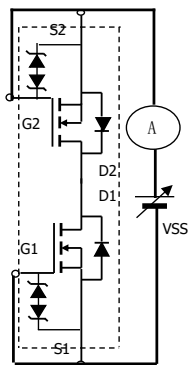

TEST CIRCUIT 2 $I_{gss1,2}$


POSITIVE VGS FOR IGSS1+
NEGATIVE VGS FOR IGSS1-

When FET1 is measured
between GATE and SOURCE
of FET2 are shorted

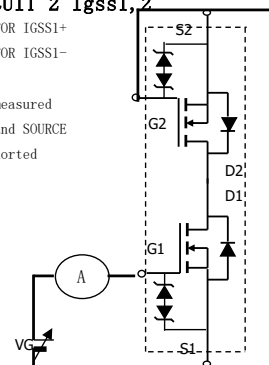


TEST CIRCUIT 3 $V_{gs(off)}$

When FET1 is measured
between GATE and SOURCE
of FET2 are shorted

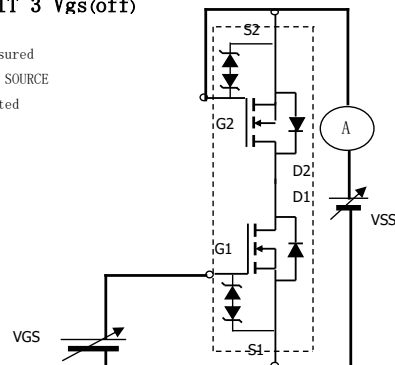


TEST CIRCUIT 4 $R_{ss(on)}$

Vss/Is

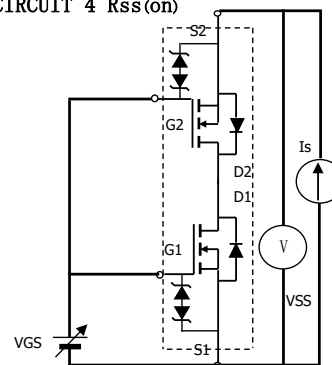


TEST CIRCUIT 5 $V_{F(SS)1,2}$

When FET1 measured
FET2 VGS=4.5V

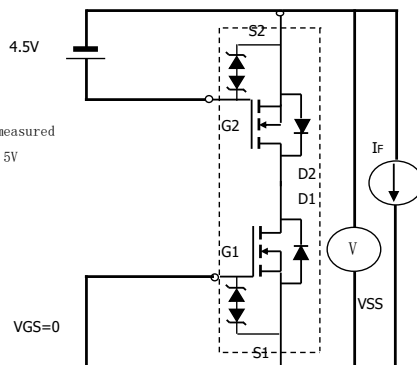

TEST CIRCUIT 6 BV_{DSS}


POSITIVE VSS FOR ISSS+
NEGATIVE VSS FOR ISSS-

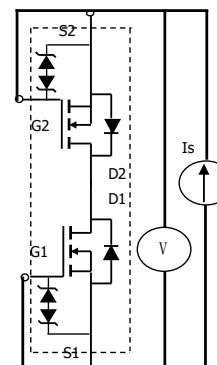

TEST CIRCUIT 7 $BV_{GS01,2}$

POSITIVE VSS FOR ISSS+
NEGATIVE VSS FOR ISSS-

When FET1 is measured
between GATE and SOURCE
of FET2 are shorted

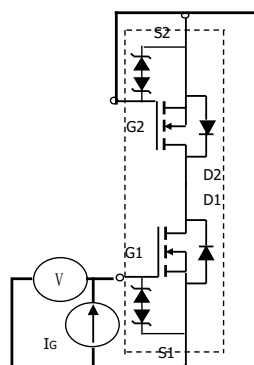

**TEST CIRCUIT 8
Switching time**

