



ALPHA & OMEGA
SEMICONDUCTOR

AON3820

24V Dual N-Channel AlphaMOS

General Description

- Trench Power AlphaMOS (α MOS LV) technology
- Low $R_{DS(ON)}$
- Low Gate Charge
- ESD protection
- RoHS and Halogen-Free Compliant

Product Summary

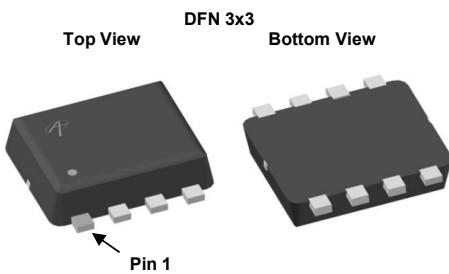
V_{DS}	24V
I_D (at $V_{GS}=4.5V$)	8A
$R_{DS(ON)}$ (at $V_{GS}=4.5V$)	< 8.9mΩ
$R_{DS(ON)}$ (at $V_{GS}=4.0V$)	< 9.5mΩ
$R_{DS(ON)}$ (at $V_{GS}=3.7V$)	< 9.6mΩ
$R_{DS(ON)}$ (at $V_{GS}=3.1V$)	< 10mΩ
$R_{DS(ON)}$ (at $V_{GS}=2.5V$)	< 11.8mΩ

Typical ESD protection

HBM Class 3A

Applications

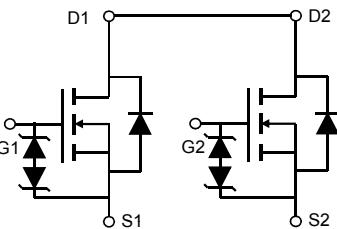
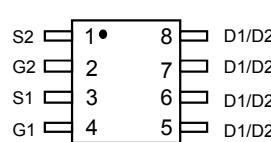
- Battery protection switch
- Mobile device battery charging and discharging



Top View

DFN 3x3

Bottom View



Orderable Part Number

Package Type

Form

Minimum Order Quantity

AON3820

DFN 3x3

Tape & Reel

3000

Absolute Maximum Ratings $T_A=25^\circ C$ unless otherwise noted

Parameter	Symbol	Maximum	Units
Drain-Source Voltage	V_{DS}	24	V
Gate-Source Voltage	V_{GS}	± 12	V
Continuous Drain Current ^G	I_D	8	A
		6.2	
Pulsed Drain Current ^C	I_{DM}	32	W
Power Dissipation ^B	P_D	2.0	
		1.3	
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to 150	°C

Thermal Characteristics

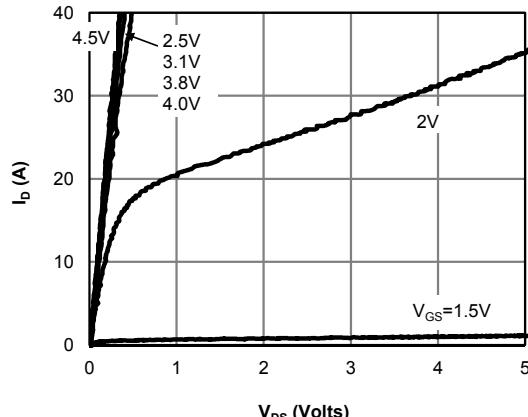
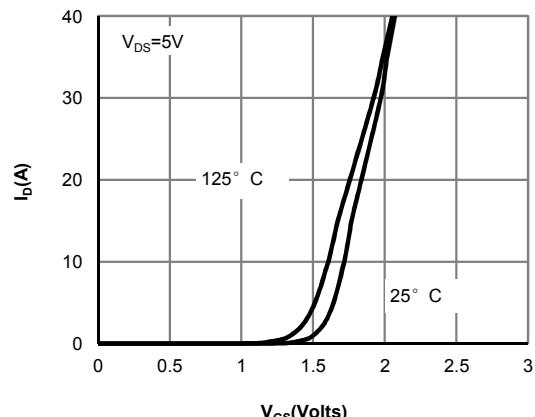
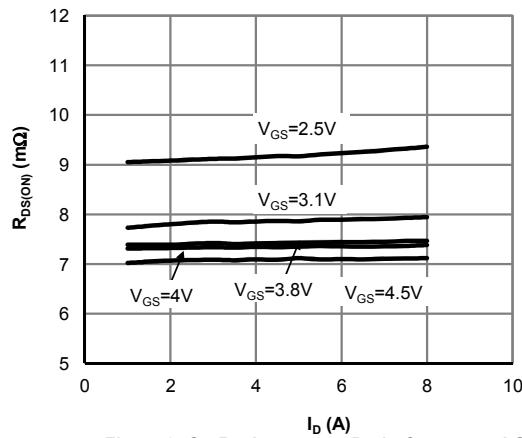
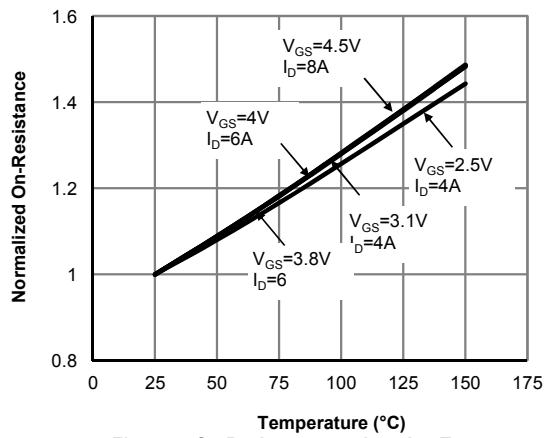
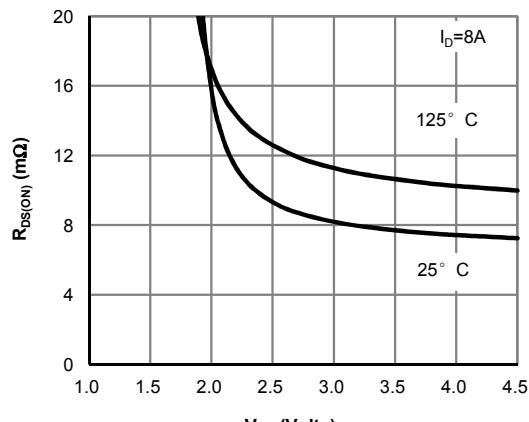
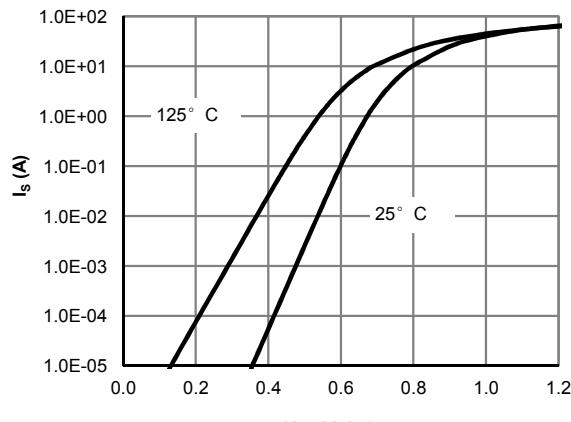
Parameter	Symbol	Typ	Max	Units
Maximum Junction-to-Ambient ^A	$R_{\theta JA}$	50	60	°C/W
		70	85	°C/W
Maximum Junction-to-Lead	$R_{\theta JL}$	30	35	°C/W

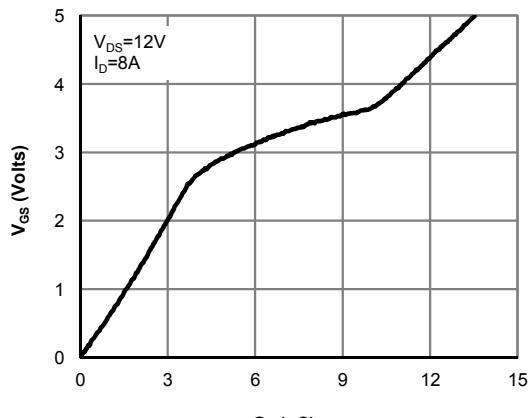
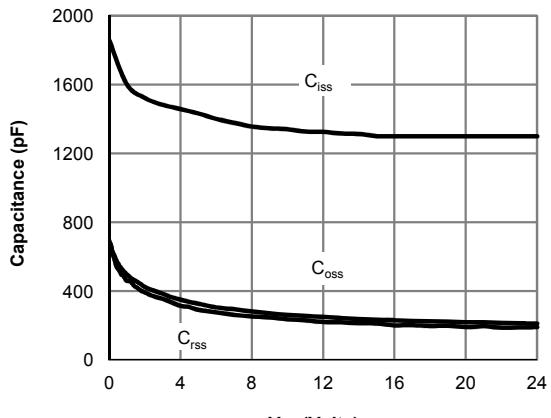
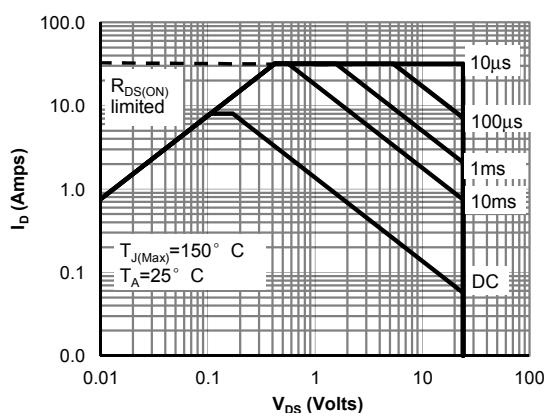
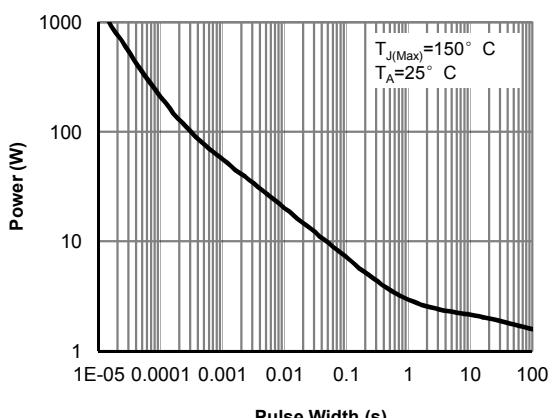
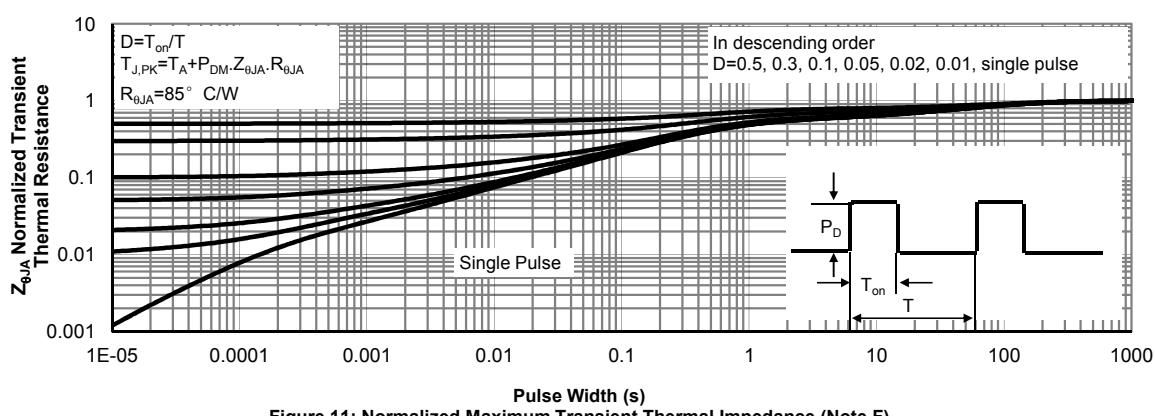
Electrical Characteristics ($T_J=25^\circ\text{C}$ unless otherwise noted)

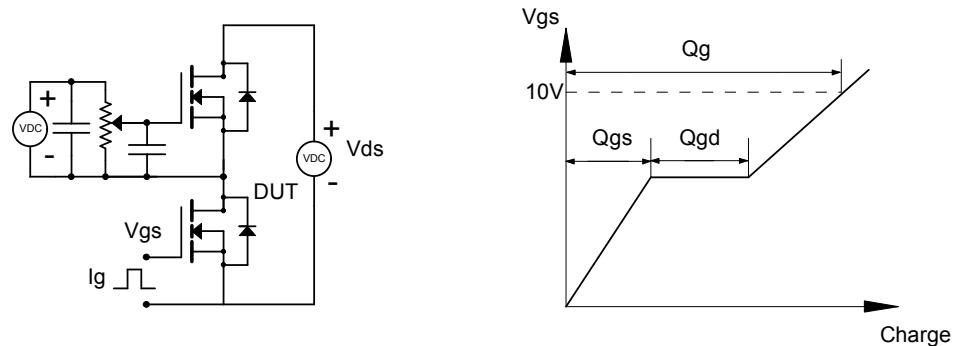
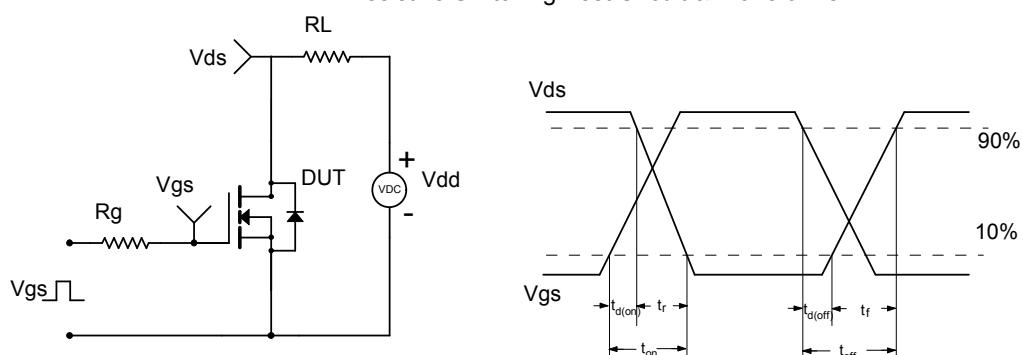
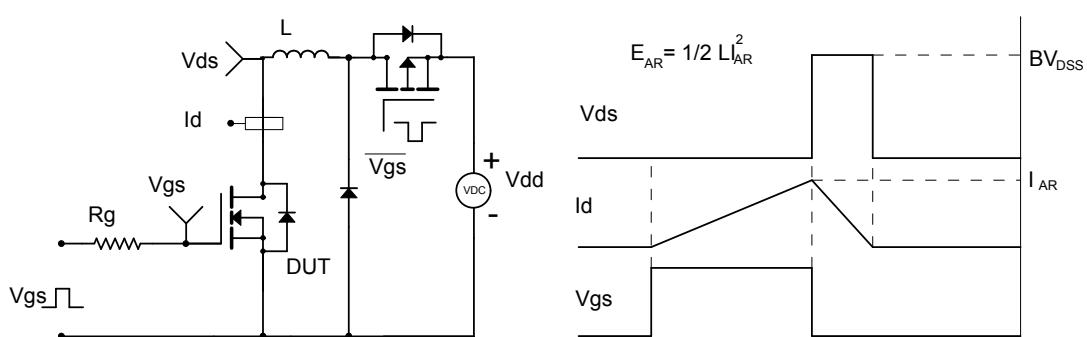
Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC PARAMETERS						
BV_{DSS}	Drain-Source Breakdown Voltage	$I_D=250\mu\text{A}, V_{GS}=0\text{V}$	24			V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS}=24\text{V}, V_{GS}=0\text{V}$ $T_J=55^\circ\text{C}$			1 5	μA
I_{GSS}	Gate-Body leakage current	$V_{DS}=0\text{V}, V_{GS}=\pm 10\text{V}$			± 10	μA
$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu\text{A}$	0.5	0.9	1.3	V
$R_{\text{DS(ON)}}$	Static Drain-Source On-Resistance	$V_{GS}=4.5\text{V}, I_D=8\text{A}$ $T_J=125^\circ\text{C}$	5 7	7.1 10	8.9 12.5	$\text{m}\Omega$
		$V_{GS}=4.0\text{V}, I_D=6\text{A}$	5.1	7.3	9.5	
		$V_{GS}=3.8\text{V}, I_D=6\text{A}$	5.2	7.4	9.6	
		$V_{GS}=3.1\text{V}, I_D=4\text{A}$	5.4	7.8	10	
		$V_{GS}=2.5\text{V}, I_D=4\text{A}$	6.2	9.0	11.8	
g_{FS}	Forward Transconductance	$V_{DS}=5\text{V}, I_D=8\text{A}$		70		S
V_{SD}	Diode Forward Voltage	$I_S=1\text{A}, V_{GS}=0\text{V}$		0.65	1	V
I_S	Maximum Body-Diode Continuous Current				3	A
DYNAMIC PARAMETERS						
C_{iss}	Input Capacitance	$V_{GS}=0\text{V}, V_{DS}=12\text{V}, f=1\text{MHz}$		1325		pF
C_{oss}	Output Capacitance			250		pF
C_{rss}	Reverse Transfer Capacitance			220		pF
R_g	Gate resistance	$f=1\text{MHz}$		1.35		k Ω
SWITCHING PARAMETERS						
Q_g	Total Gate Charge	$V_{GS}=4.5\text{V}, V_{DS}=12\text{V}, I_D=8\text{A}$		12.5	20	nC
Q_{gs}	Gate Source Charge			4.1		nC
Q_{gd}	Gate Drain Charge			6.0		nC
$t_{D(\text{on})}$	Turn-On Delay Time	$V_{GS}=4.5\text{V}, V_{DS}=12\text{V}, R_L=1.5\Omega, R_{\text{GEN}}=3\Omega$		0.9		μs
t_r	Turn-On Rise Time			1.9		μs
$t_{D(\text{off})}$	Turn-Off Delay Time			1.8		μs
t_f	Turn-Off Fall Time			3.4		μs

- A. The value of R_{QA} is measured with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with $T_A = 25^\circ\text{C}$. The value in any given application depends on the user's specific board design.
- B. The power dissipation P_D is based on $T_{J(\text{MAX})}=150^\circ\text{C}$, using $\leq 10\text{s}$ junction-to-ambient thermal resistance.
- C. Repetitive rating, pulse width limited by junction temperature $T_{J(\text{MAX})}=150^\circ\text{C}$. Ratings are based on low frequency and duty cycles to keep initial $T_J=25^\circ\text{C}$.
- D. The R_{QA} is the sum of the thermal impedance from junction to lead R_{QL} and lead to ambient.
- E. The static characteristics in Figures 1 to 6 are obtained using <300 μs pulses, duty cycle 0.5% max.
- F. These curves are based on the junction-to-ambient thermal impedance which is measured with the device mounted on 1in² FR-4 board with 2oz. Copper, assuming a maximum junction temperature of $T_{J(\text{MAX})}=150^\circ\text{C}$. The SOA curve provides a single pulse rating.

THIS PRODUCT HAS BEEN DESIGNED AND QUALIFIED FOR THE CONSUMER MARKET. APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

Figure 1: On-Region Characteristics (Note E)

Figure 2: Transfer Characteristics (Note E)

Figure 3: On-Resistance vs. Drain Current and Gate Voltage (Note E)

Figure 4: On-Resistance vs. Junction Temperature (Note E)

Figure 5: On-Resistance vs. Gate-Source Voltage (Note E)

Figure 6: Body-Diode Characteristics (Note E)

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

Figure 7: Gate-Charge Characteristics

Figure 8: Capacitance Characteristics

Figure 9: Maximum Forward Biased Safe Operating Area (Note F)

Figure 10: Single Pulse Power Rating Junction-to-Ambient (Note F)

Figure 11: Normalized Maximum Transient Thermal Impedance (Note F)

Gate Charge Test Circuit & Waveform

Resistive Switching Test Circuit & Waveforms

Unclamped Inductive Switching (UIS) Test Circuit & Waveforms

Diode Recovery Test Circuit & Waveforms
