






### DFN3.5x2.5\_12L\_EP2\_S PACKAGE OUTLINE

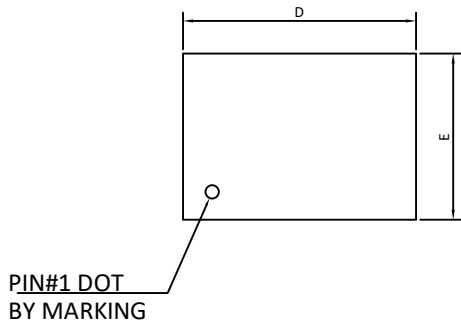

TOP VIEW

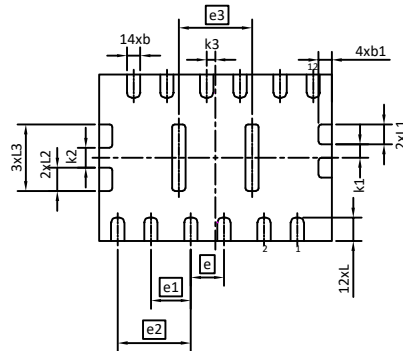


BOTTOM VIEW



SIDE VIEW

### RECOMMENDED LAND PATTERN

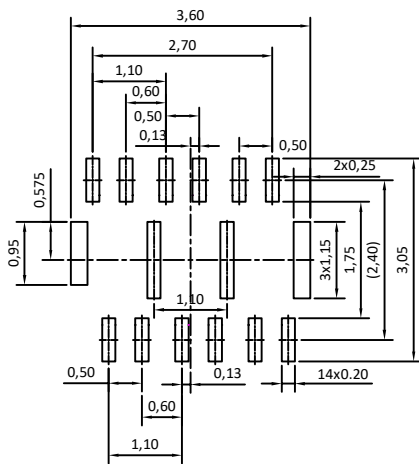

SYMBOLS	DIM. IN MM			DIM. IN INCH		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	0.500	0.550	0.600	0.020	0.022	0.024
A1	0.000	-	0.050	0.000	-	0.002
A2	(0.150)			(0.006)		
b	0.150	0.200	0.250	0.006	0.008	0.010
b1	0.100	0.200	0.300	0.004	0.008	0.012
D	3.400	3.500	3.600	0.134	0.138	0.142
E	2.400	2.500	2.600	0.094	0.098	0.102
e	0.50BSC			0.020BSC		
e1	0.60BSC			0.024BSC		
e2	1.10BSC			0.043BSC		
e3	1.10BSC			0.006REF		
K1	(0.200)			(0.008)		
K2	(0.300)			(0.012)		
K3	(0.130)			(0.005)		
L	0.300	0.350	0.400	0.012	0.014	0.016
L1	0.250	0.300	0.350	0.010	0.012	0.014
L2	0.300	0.350	0.400	0.012	0.014	0.016
L3	0.900	1.000	1.100	0.035	0.039	0.043

UNIT: mm

**NOTE**

1. CONTROLLING DIMENSION IS MILLIMETER.  
CONVERTED INCH DIMENSIONS ARE NOT NECESSARILY EXACT.
2. TOLERANCE:  $\pm 0.05$  UNLESS OTHERWISE SPECIFIED.
3. RADIUS ON ALL CORNER ARE 0.152 MAX., UNLESS OTHERWISE SPECIFIED.
4. PACKAGE WARPAGE: 0.012 MAX.
5. NO ANY PLASTIC FLASH ALLOWED ON THE TOP AND BOTTOM LEAD SURFACE.
6. PAD PLANARITY:  $\pm 0.102$
7. CRACK BETWEEN PLASTIC BODY AND LEAD IS NOT ALLOWED.