





TSOT23_6L PACKAGE OUTLINE

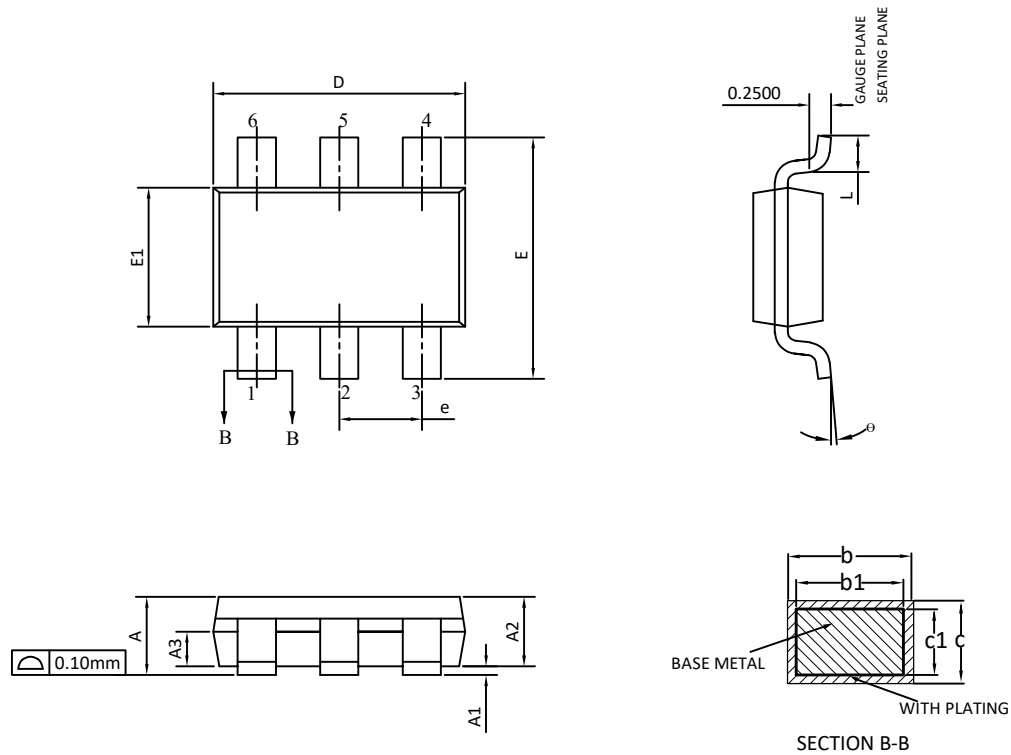

RECOMMENDED LAND PATTERN



UNIT: mm

SYMBOLS	DIM. IN MM			DIM. IN INCH		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	---	---	0.950	---	---	0.037
A1	0.000	---	0.100	0.000	---	0.004
A2	0.750	0.800	0.850	0.030	0.031	0.033
A3	0.350	0.400	0.450	0.014	0.016	0.018
b	0.300	0.440	0.500	0.012	0.017	0.020
b1	0.300	0.400	0.450	0.012	0.016	0.018
c	0.110	0.160	0.200	0.004	0.006	0.008
c1	0.110	0.130	0.150	0.004	0.005	0.006
D	2.700	2.900	3.100	0.106	0.114	0.122
E	2.600	2.800	3.000	0.102	0.110	0.118
E1	1.500	1.600	1.700	0.059	0.063	0.067
e	0.95BSC			0.037BSC		
L	0.300	0.400	0.500	0.012	0.016	0.020
θ	0°	---	8°	0°	---	8°

NOTE

- PACKAGE BODY SIZES EXCLUDE MOLD FLASH OR GATE BURRS.
MOLD FLASH AT THE NON-LEAD SIDES SHOULD BE LESS THAN 6 MILS EACH.
- TOLERANCE +/-0.100 mm (4 mil) UNLESS OTHERWISE SPECIFIED.
- DIMENSION L IS MEASURED IN GAUGE PLANE.
- CONTROLLING DIMENSION IS MILLIMETER. CONVERTED INCH DIMENSIONS ARE NOT NECESSARILY EXACT.
- ALL DIMENSIONS ARE IN MILLIMETERS.