






DFN3.3x3.3B_8L_EP1_S PACKAGE OUTLINE

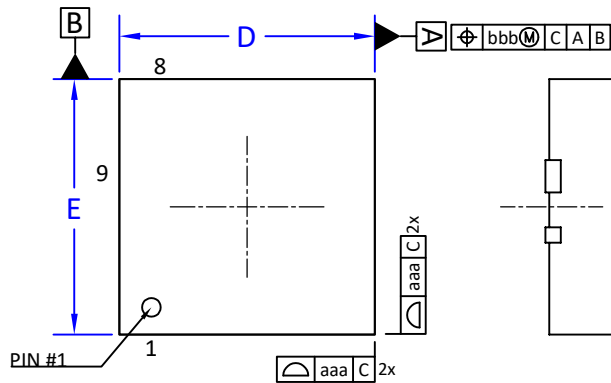

TOP VIEW

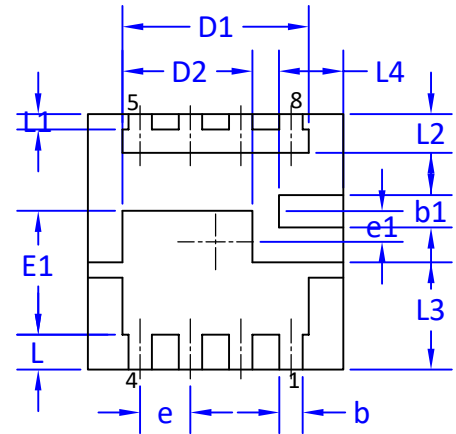


BOTTOM VIEW

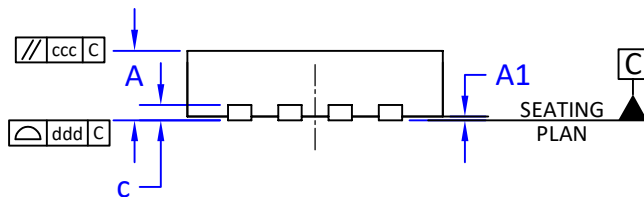

SIDE VIEW

RECOMMENDED LAND PATTERN

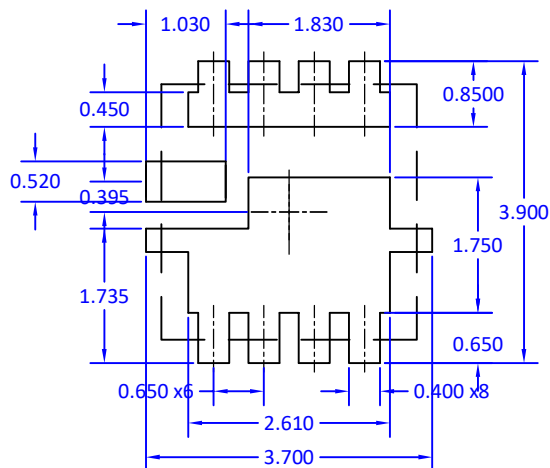

SYMBOLS	DIMENSION IN MM			DIMENSION IN INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.80	0.90	1.00	0.031	0.035	0.039
A1	0.00	0.02	0.05	0.000	0.001	0.002
b	0.20	0.30	0.40	0.008	0.012	0.016
b1	0.32	0.42	0.52	0.013	0.017	0.020
c	0.203BSC			0.008BSC		
D	3.20	3.30	3.40	0.126	0.130	0.134
D1	2.31	2.41	2.51	0.091	0.095	0.099
D2	1.58	1.68	1.78	0.062	0.066	0.070
E	3.20	3.30	3.40	0.126	0.130	0.134
E1	1.50	1.60	1.70	0.059	0.063	0.067
e	0.65BSC			0.026BSC		
e1	0.395BSC			0.016BSC		
L	0.35	0.45	0.55	0.014	0.018	0.022
L1	0.10	0.20	0.30	0.004	0.008	0.012
L2	0.40	0.50	0.60	0.016	0.020	0.024
L3	1.285	1.385	1.485	0.051	0.055	0.058
L4	0.73	0.83	0.93	0.029	0.033	0.037

NOTE

UNIT: mm

1. CONTROLLING DIMENSION IS MILLIMETER.
CONVERTED INCH DIMENSIONS ARE NOT NECESSARILY EXACT.
2. THIS PACKAGE WAS QUALIFIED USING IR REFLOW PROCESS (JEDEC STANDARD). FOR USAGE
IN OTHER SOLDERING PROCESSES, PLEASE CONTACT LOCAL AOS REPRESENTATIVES.