






DFN2x2A_6L_EP2_S PACKAGE OUTLINE

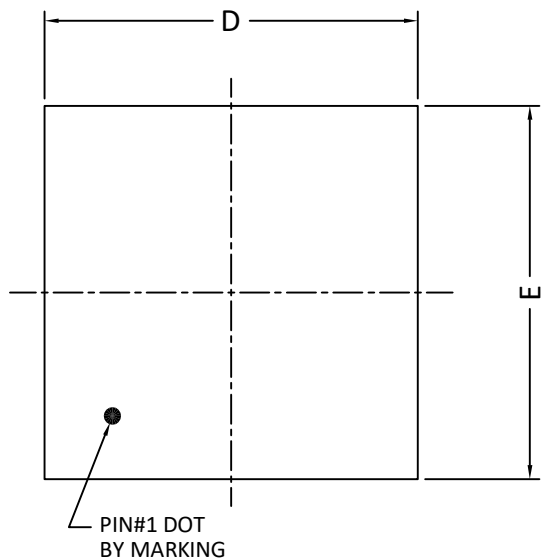

TOP VIEW

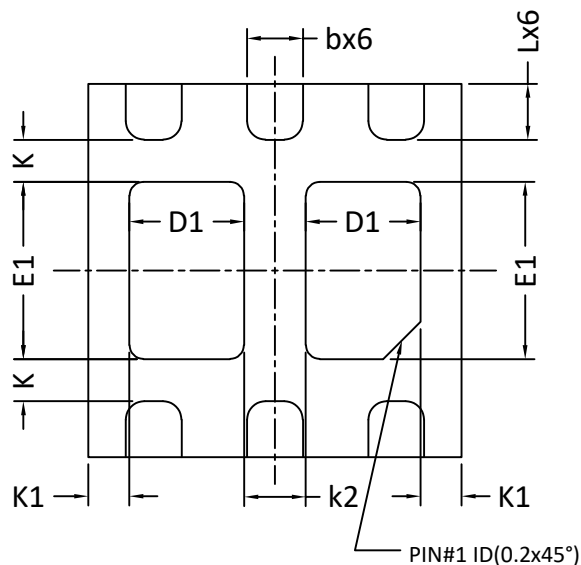


BOTTOM VIEW

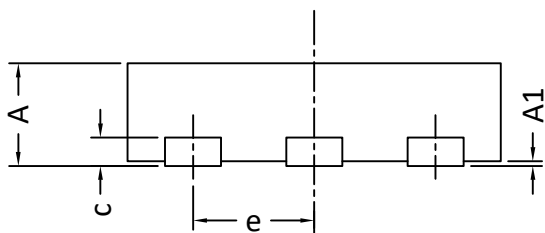

SIDE VIEW

RECOMMENDED LAND PATTERN

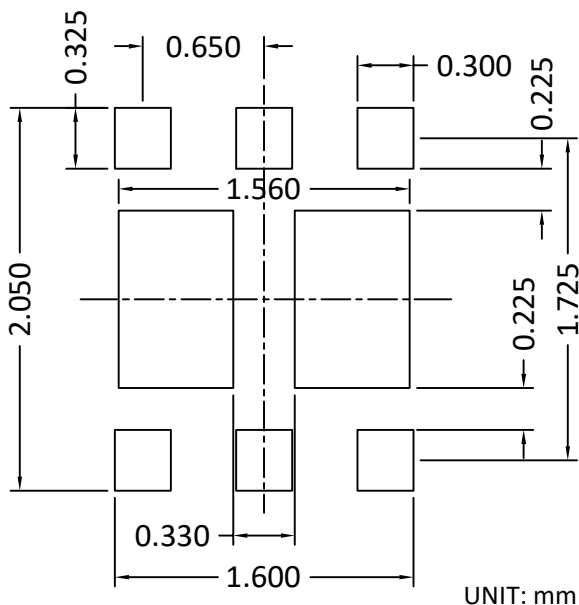

UNIT: mm

SYMBOLS	DIM. IN MM			DIM. IN INCH		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	0.500	0.550	0.600	0.020	0.022	0.024
A1	0.000	-	0.050	0.000	-	0.002
b	0.250	0.300	0.350	0.010	0.012	0.014
c	0.152REF			0.006REF		
D	1.900	2.000	2.100	0.075	0.079	0.083
D1	0.515	0.615	0.715	0.020	0.024	0.028
E	1.900	2.000	2.100	0.075	0.079	0.083
E1	0.850	0.950	1.050	0.033	0.037	0.041
e	0.65BSC			0.026BSC		
K	0.225BSC			0.009BSC		
K1	0.22BSC			0.009BSC		
K2	0.33BSC			0.013BSC		
L	0.250	0.300	0.350	0.010	0.012	0.014

NOTE

1. CONTROLLING DIMENSION IS MILLIMETER.
CONVERTED INCH DIMENSIONS ARE NOT NECESSARILY EXACT.
2. THIS PACKAGE WAS QUALIFIED USING IR REFLOW PROCESS (JEDEC STANDARD). FOR USAGE IN OTHER SOLDERING PROCESSES, PLEASE CONTACT LOCAL AOS REPRESENTATIVES.